

09756722.014004

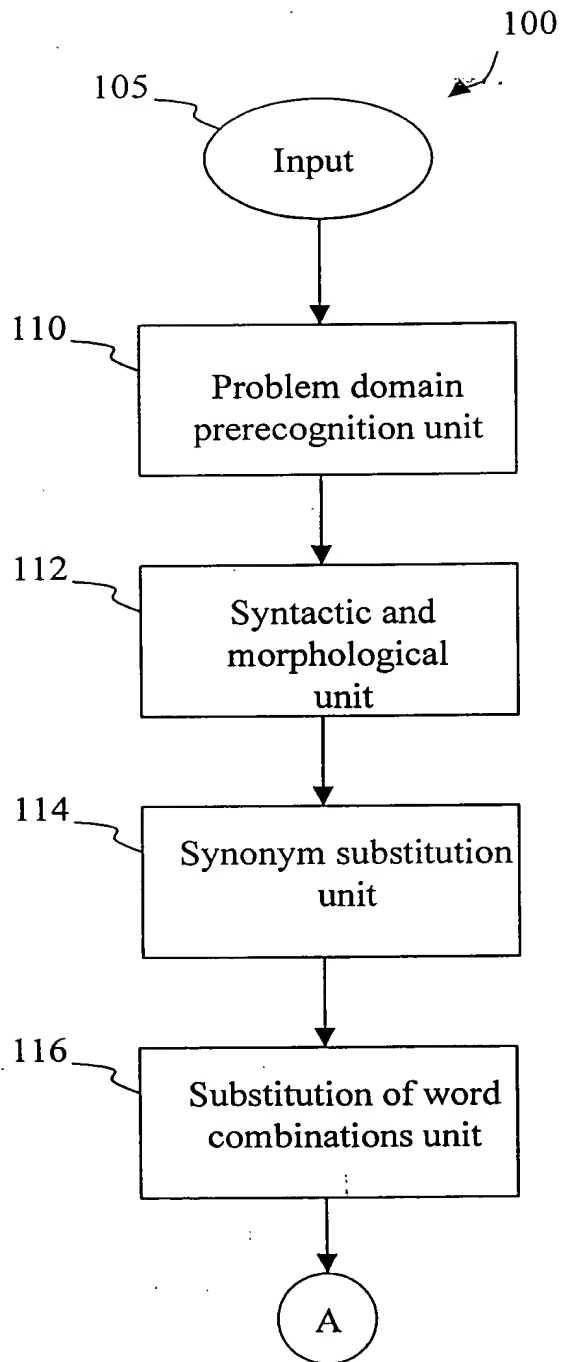


FIG. 1A

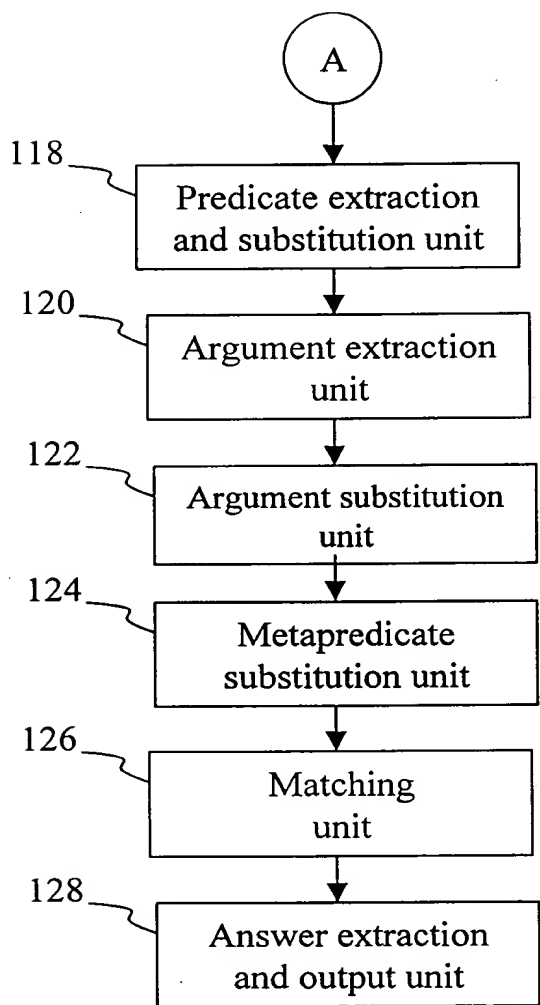


FIG. 1B

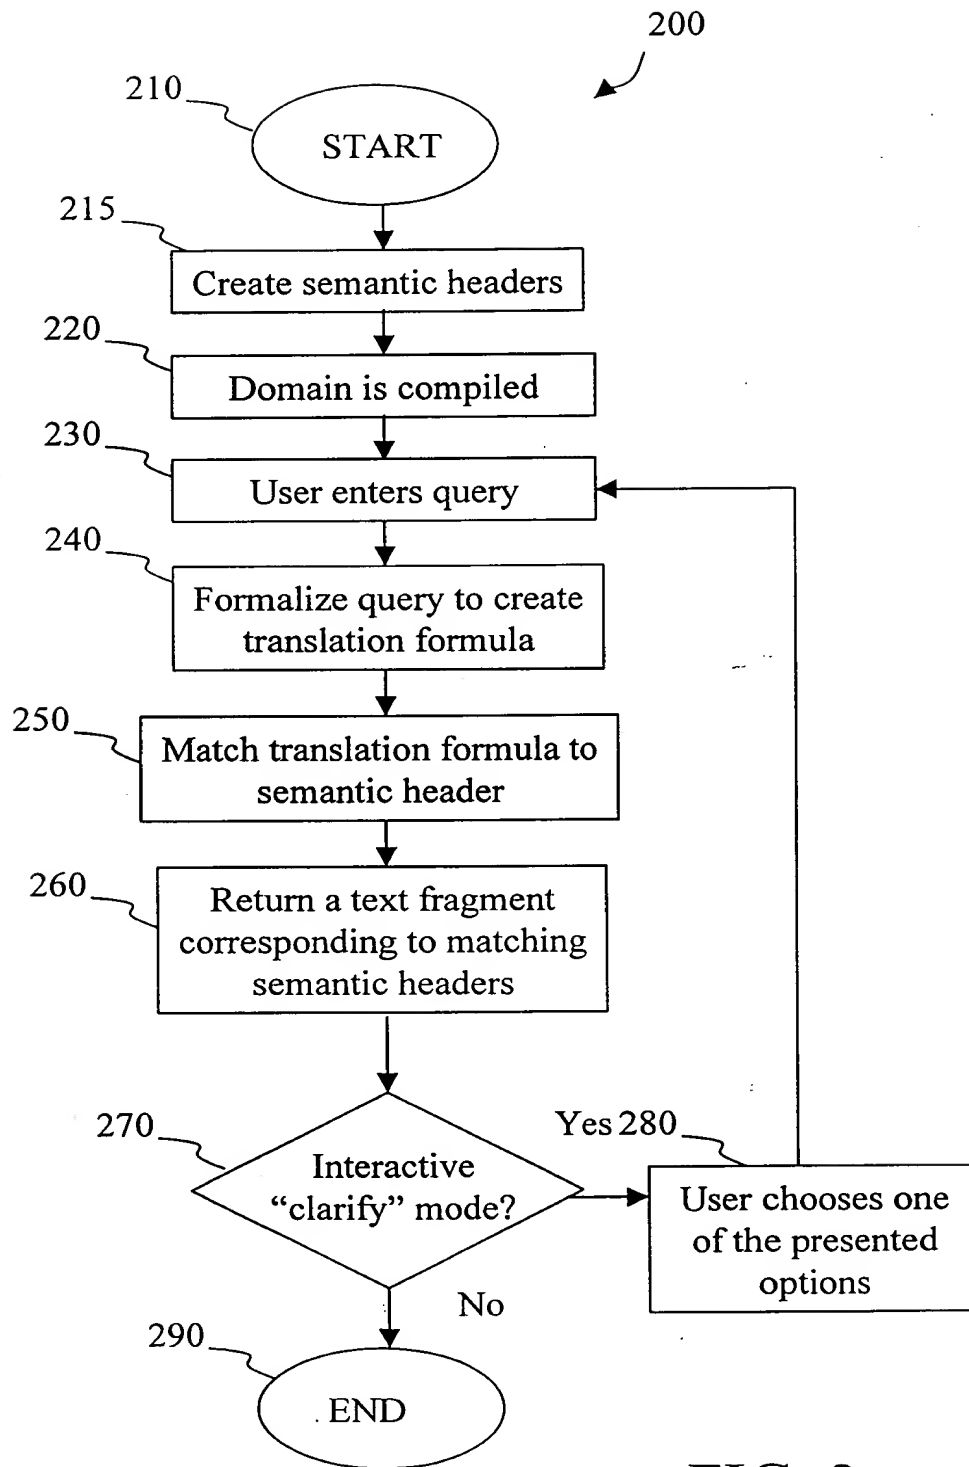


FIG. 2

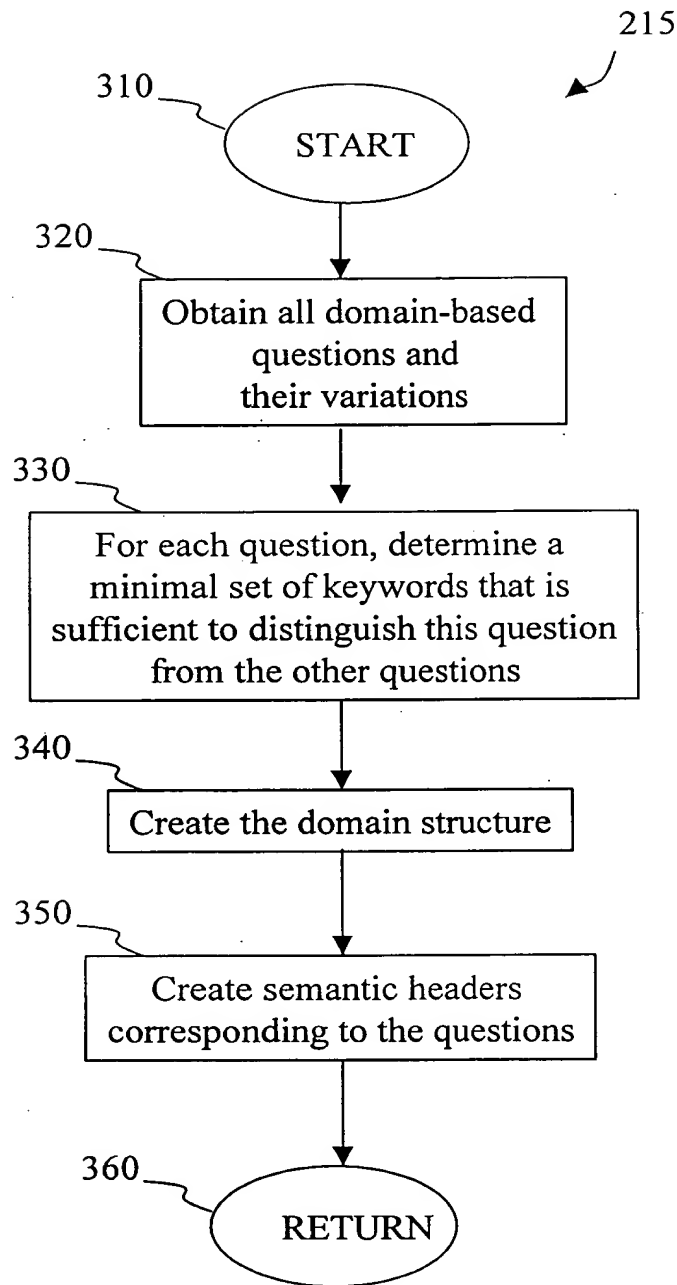


FIG. 3

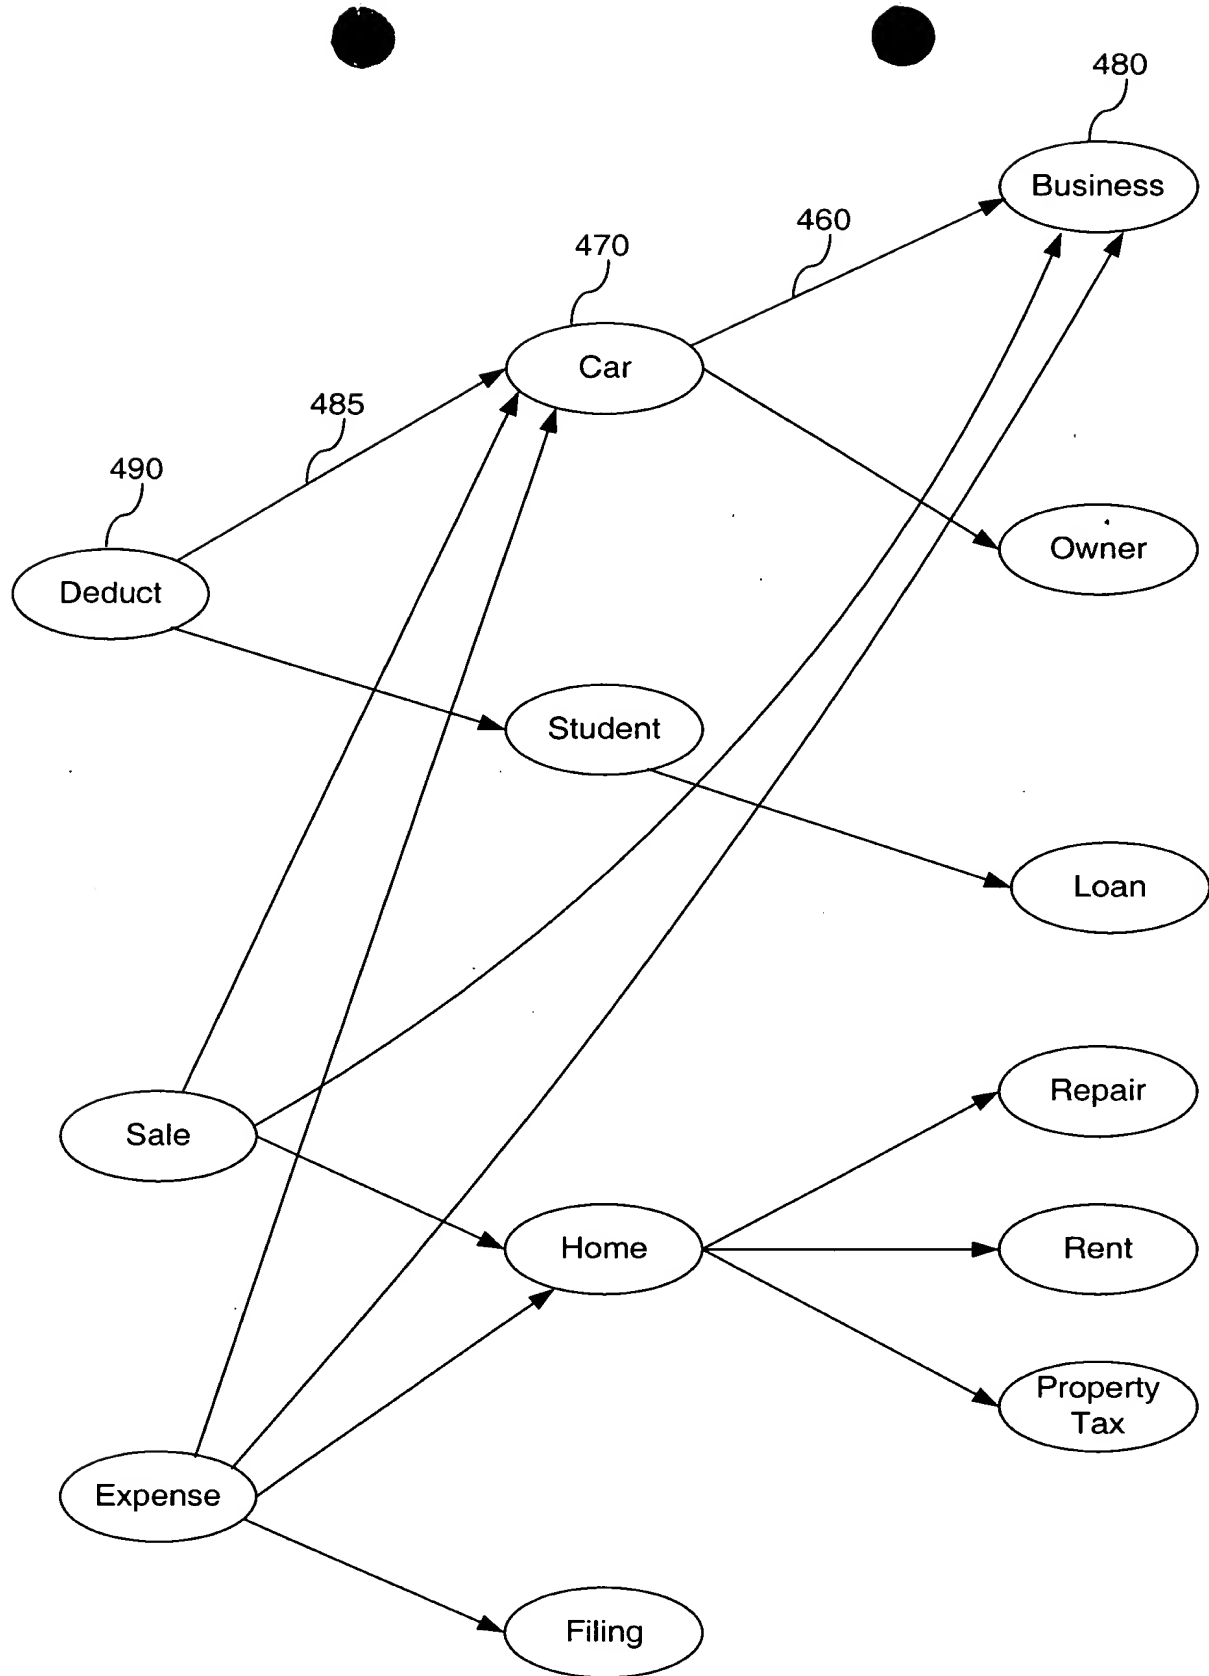


FIG. 4

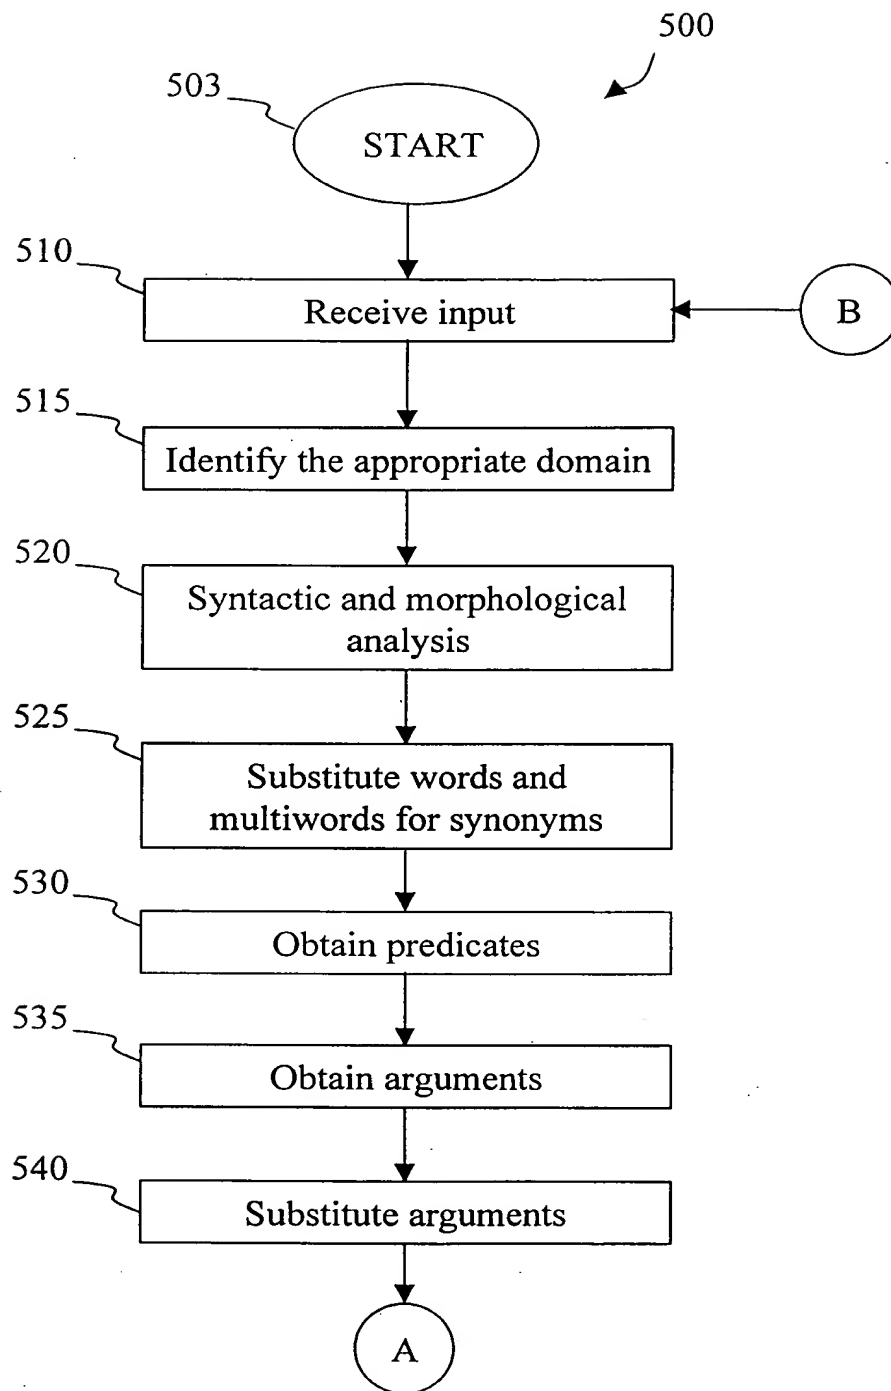


FIG. 5A

```
graph TD; A((A)) --> 545[Substitute metapredicates]; 545 --> 550[Match translation formula with semantic headers]; 550 --> 555[Display answer]; 555 --> 560{Interactive "clarify" mode?}; 560 -- Yes --> 280[User chooses one of the presented options]; 280 --> B((B)); 560 -- No --> 565([END]);
```

The flowchart illustrates the process of an interactive 'clarify' mode. It begins with a start node 'A', which leads to a process box '545' labeled 'Substitute metapredicates'. This is followed by a process box '550' labeled 'Match translation formula with semantic headers', and then a process box '555' labeled 'Display answer'. The flow then enters a decision diamond '560' labeled 'Interactive "clarify" mode?'. If the answer is 'Yes', the flow proceeds to a process box '280' labeled 'User chooses one of the presented options', which then leads to a node 'B'. If the answer is 'No', the flow proceeds to an end node '565' labeled 'END'.

FIG. 5B

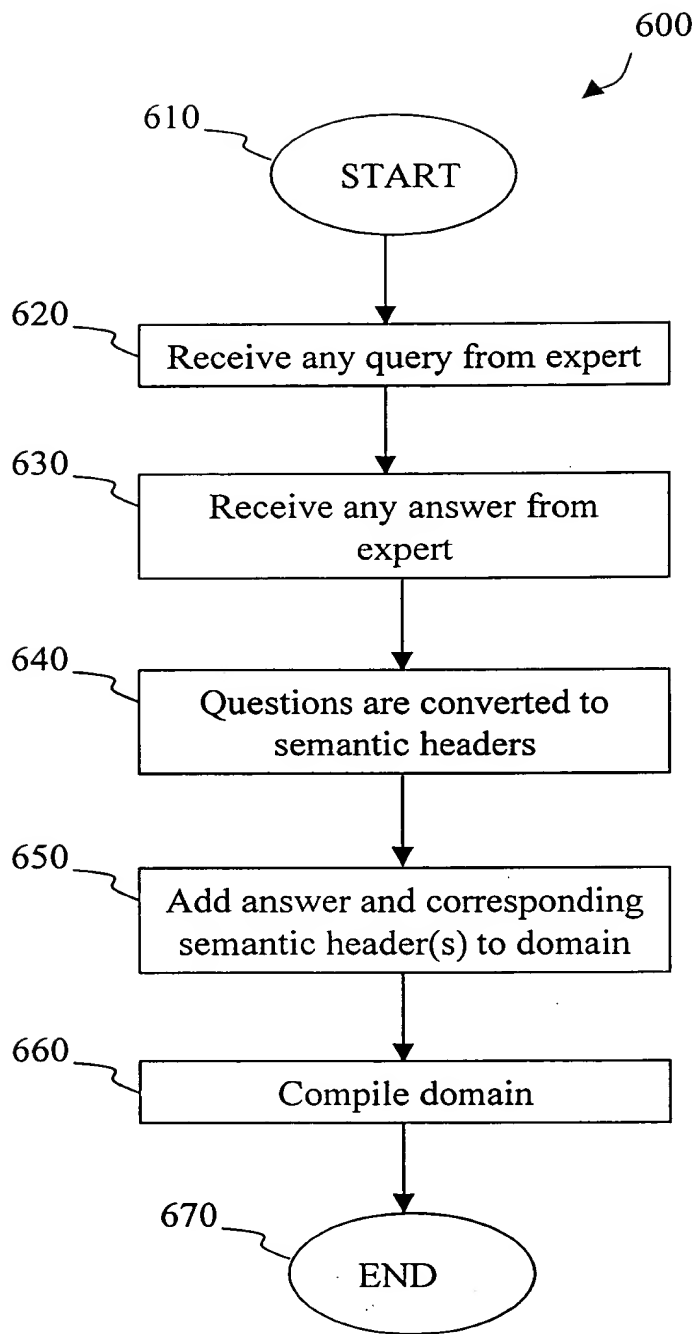


FIG. 6

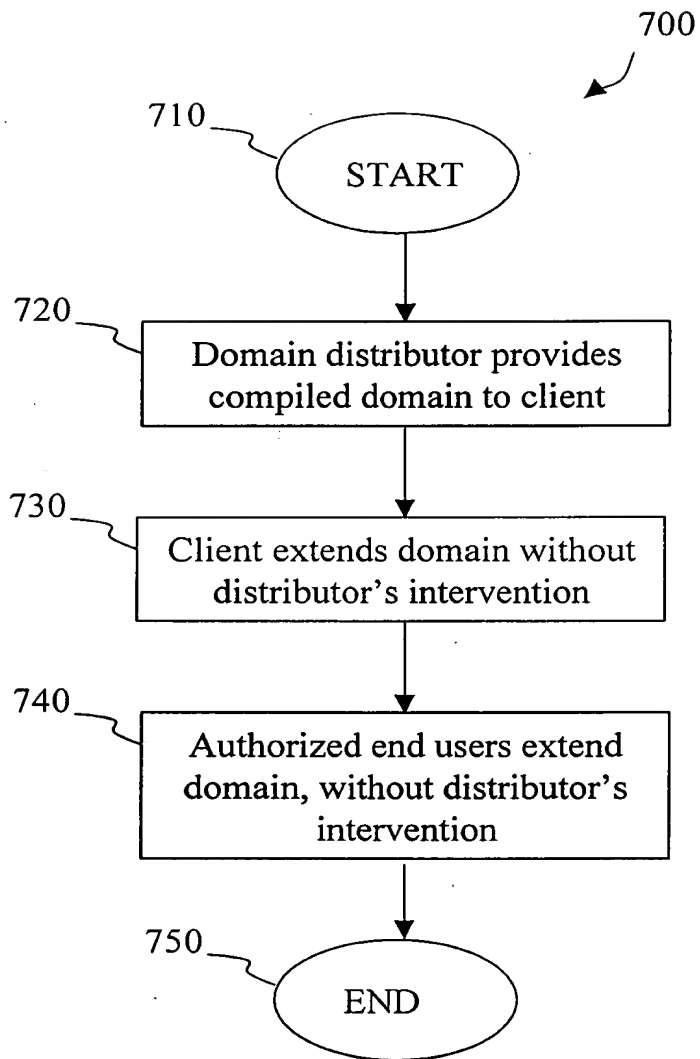


FIG. 7

Computer System 800

FIG. 8

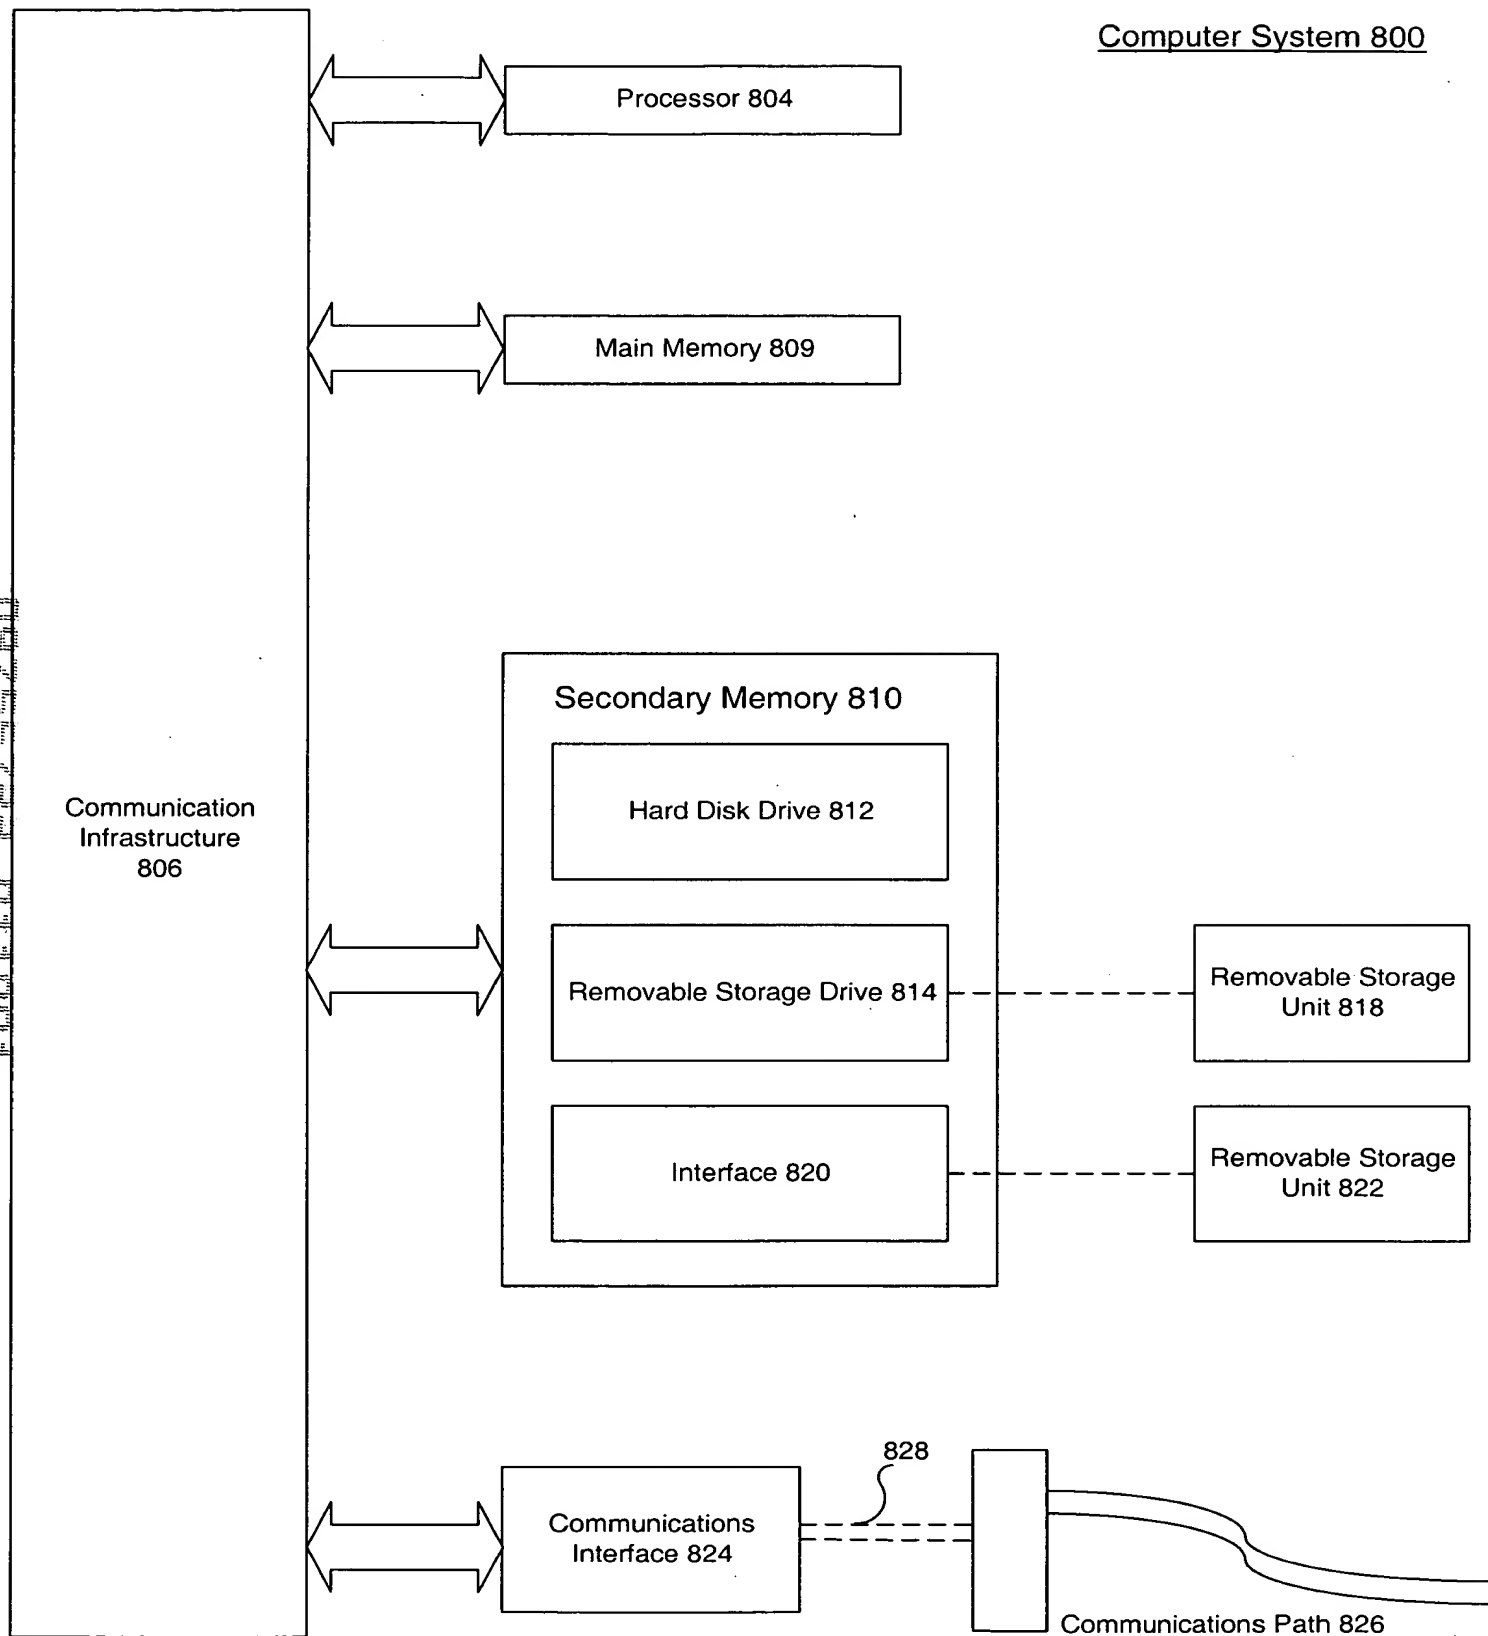


FIG. 8

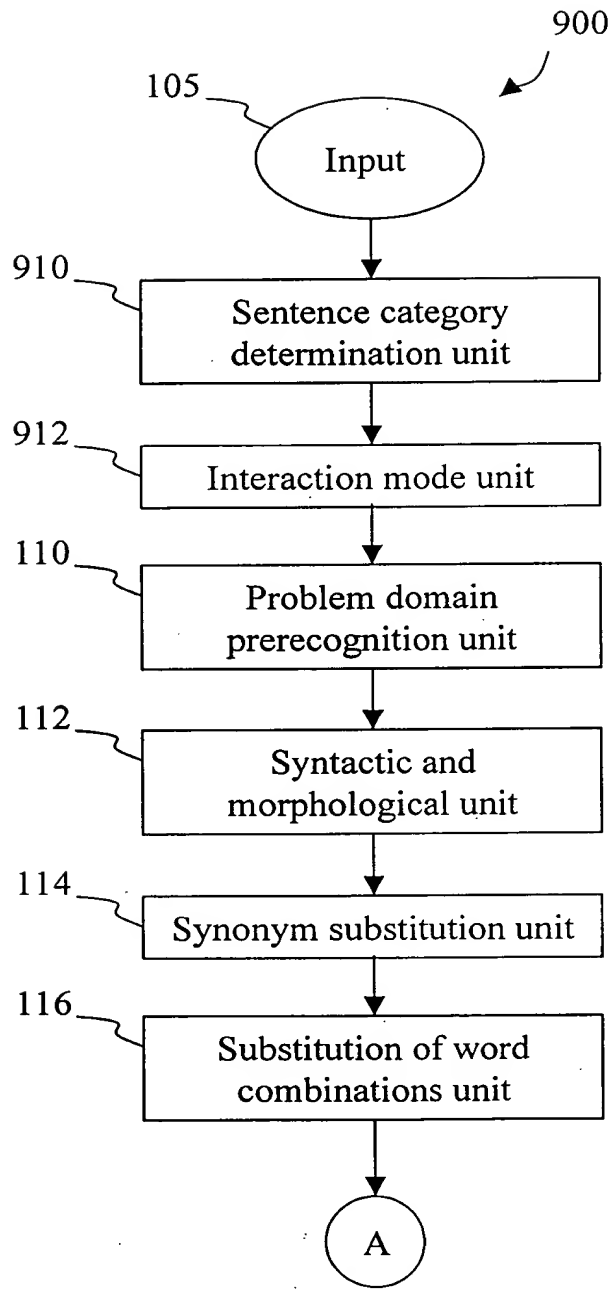


FIG. 9A

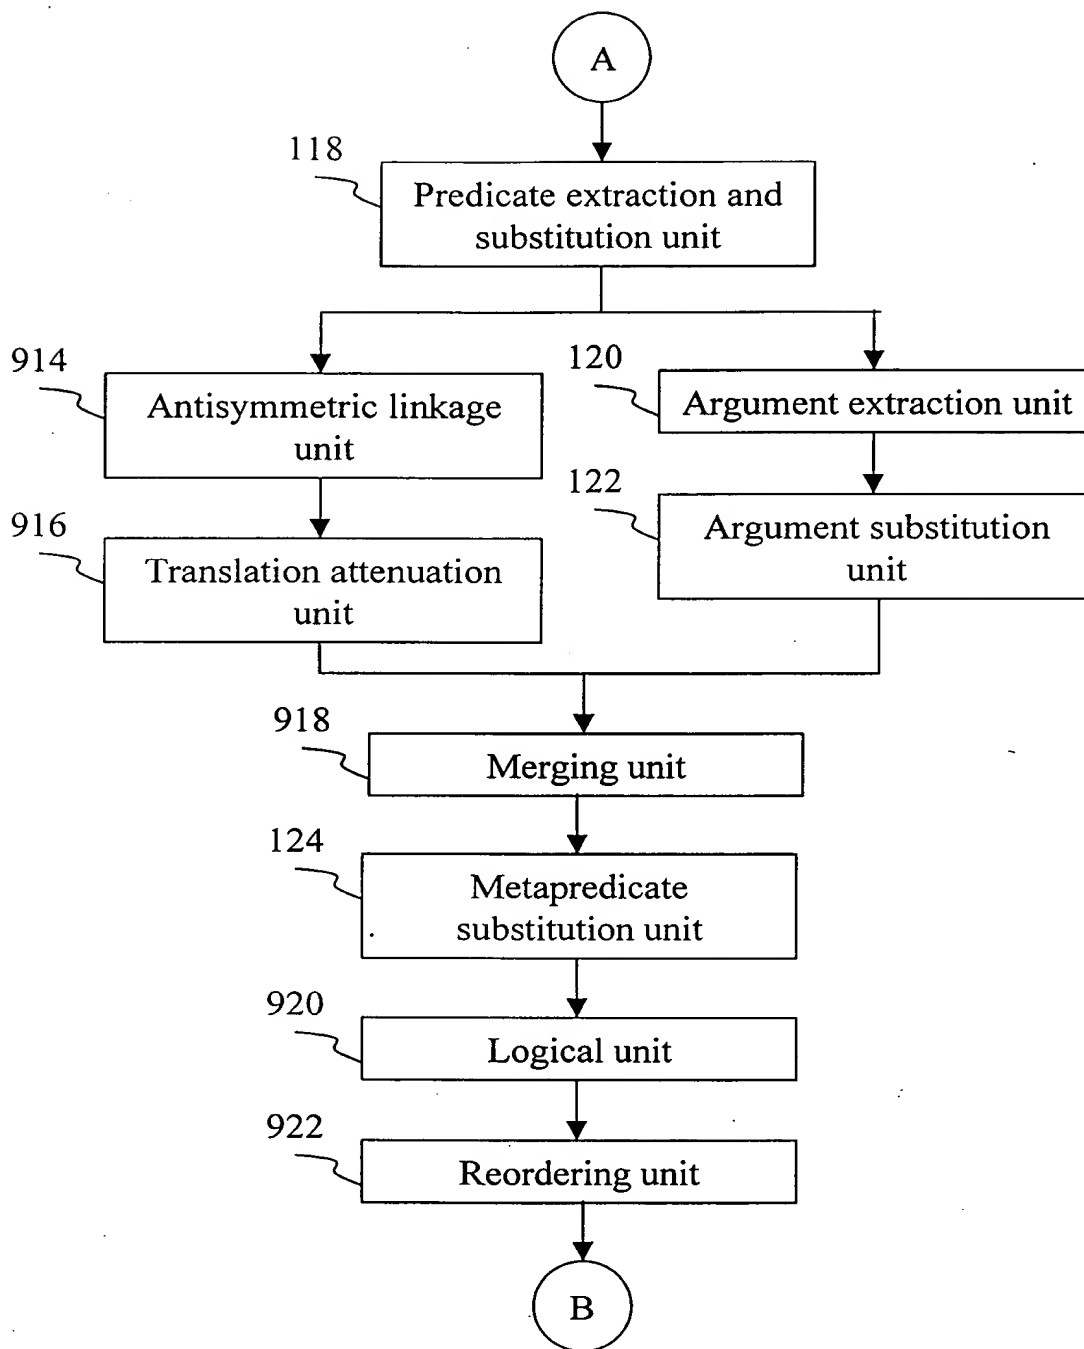


FIG. 9B

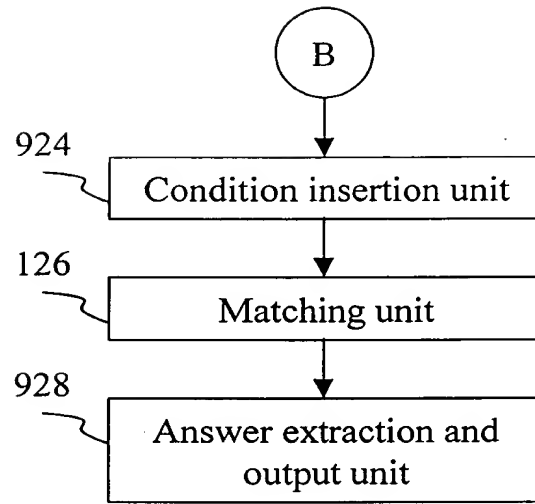


FIG. 9C

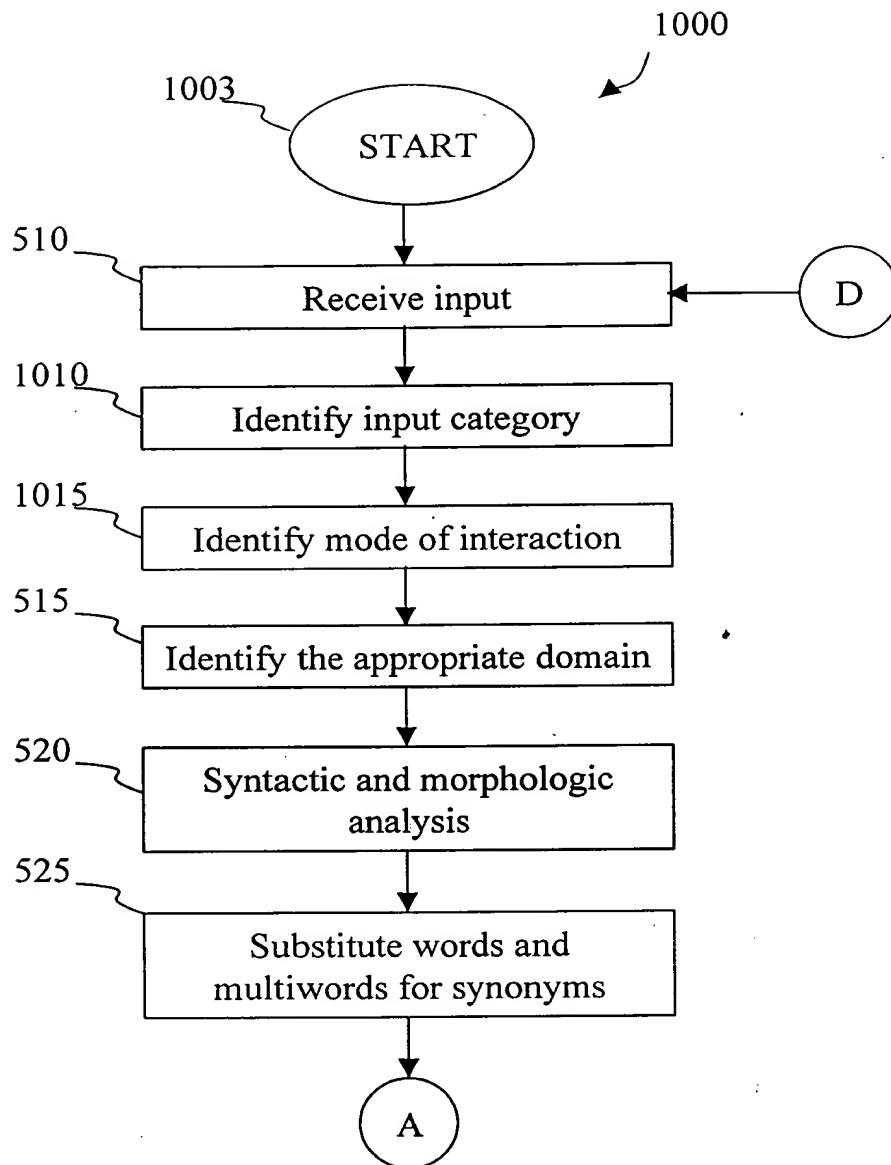


FIG. 10A

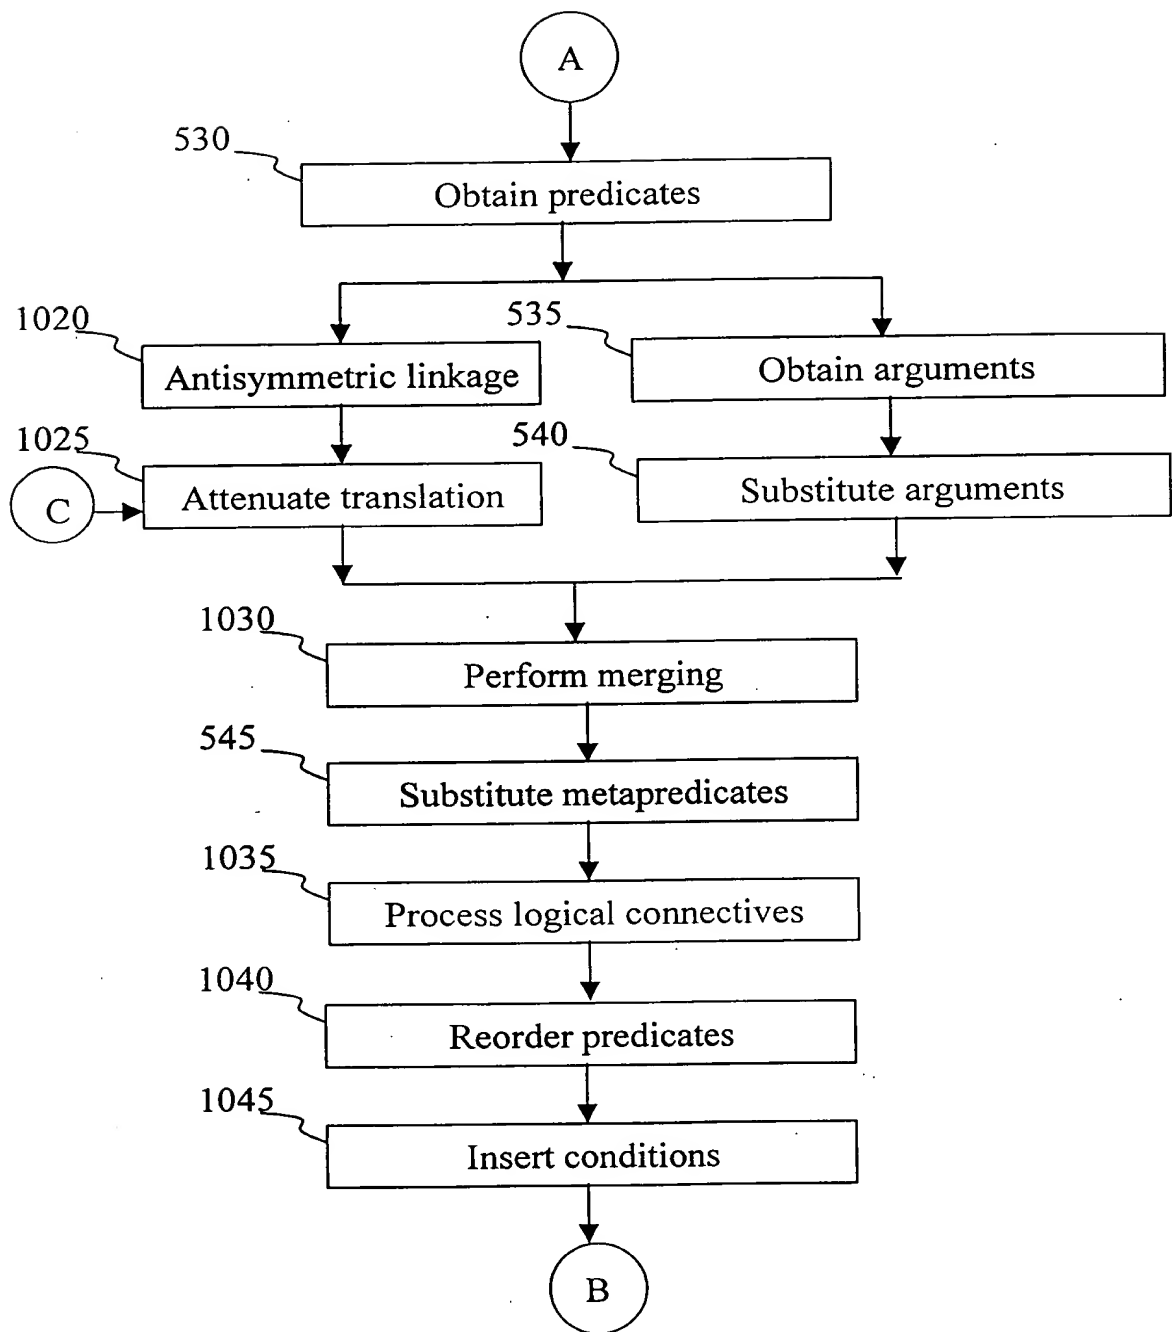


FIG. 10B

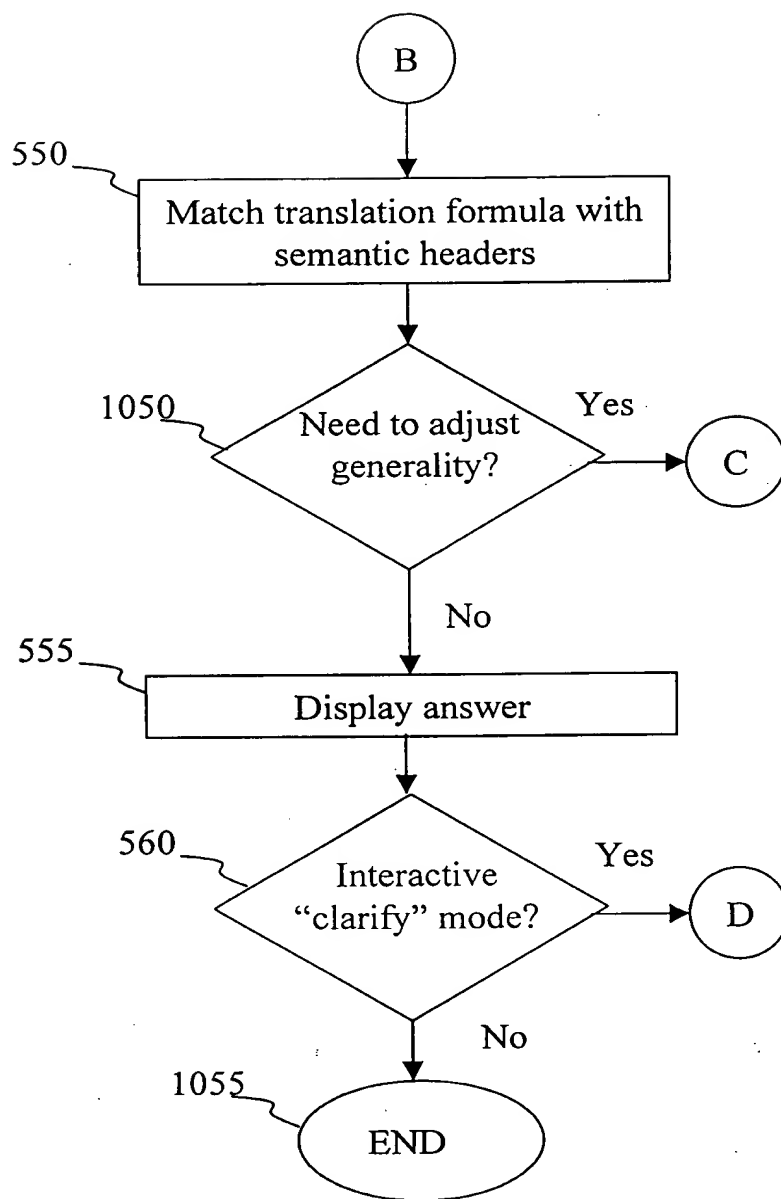


FIG. 10C